



miniCT

The miniCT is Valeport's real time Conductivity and Temperature sensor package. It features high accuracy sensors combined with a robust design to make it suitable for inclusion in a variety of sensor suites, fixed site monitoring in still wells or for use on frames and buoys, ROVs, AUVs and ASVs.

The miniCT interfaces seamlessly with the Valeport TideMaster, should the logging and display of data be required.

DATA SHEET

Product Details



**CONDUCTIVITY &
TEMPERATURE**



**DATALOG
X2 SOFTWARE**

Valeport Limited
St. Peter's Quay, Totnes,
Devon TQ9 5EW United Kingdom

Telephone: +44 (0) 1803 869292
Email: sales@valeport.co.uk
www.valeport.co.uk



Sensors

Valeport's digital inductive conductivity sensor boasts several design features that allow it to perform to specification even under the harshest of environments.

Specially selected materials maintain dimensional stability to 6000m water depth, and the unique digital sampling system means that the sensor not only uses very little power, but also that the measurements are totally unaffected by environmental temperature. The miniCT also features a robust, titanium housed PRT temperature sensor.

Conductivity

Type Valeport inductive cell

Range 0 - 80mS/cm

Accuracy ± 0.01 mS/cm

Resolution 0.001mS/cm

Temperature

Type Titanium housed PRT

Range -5 - +35°C

Accuracy ± 0.01 °C

Resolution 0.001°C

Data Acquisition

Sampling Continuous data output, on command or on power up

Data Rate 1, 2, 4 or 8Hz

Communications

Output RS232 & RS485 fitted as standard

Protocol 4800 to 115200 baud, (8,1,N)

Format ASCII text data

Physical

Materials Titanium housing (as ordered), polyurethane and ceramic sensor components

Depth 6000m (Titanium)

Size 40mm \varnothing x 285mm long (including connector)

Weight 1kg - Titanium

Electrical

Input 9 – 28V DC

Power <250mW @12v

Connector SubConn MCBH6F

Software

System is supplied with DataLog X2 Windows based PC software, for instrument setup, data extraction and display. DataLog X2 is licence free.


Ordering

0660006

miniCT in Titanium

Supplied with:

- Interface lead
- Operating manual and transit case

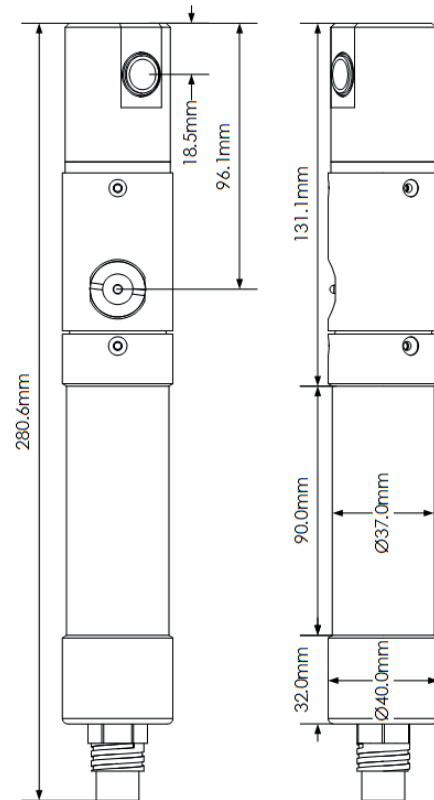

Datasheet Reference: miniCT | April 2020

As part of our policy of continuing development, Valeport Ltd. reserve the right to alter at any time, without notice, all prices, specifications, designs and conditions of sale of all equipment - Valeport Ltd © 2020

