


Oxygen hysteresis is history.

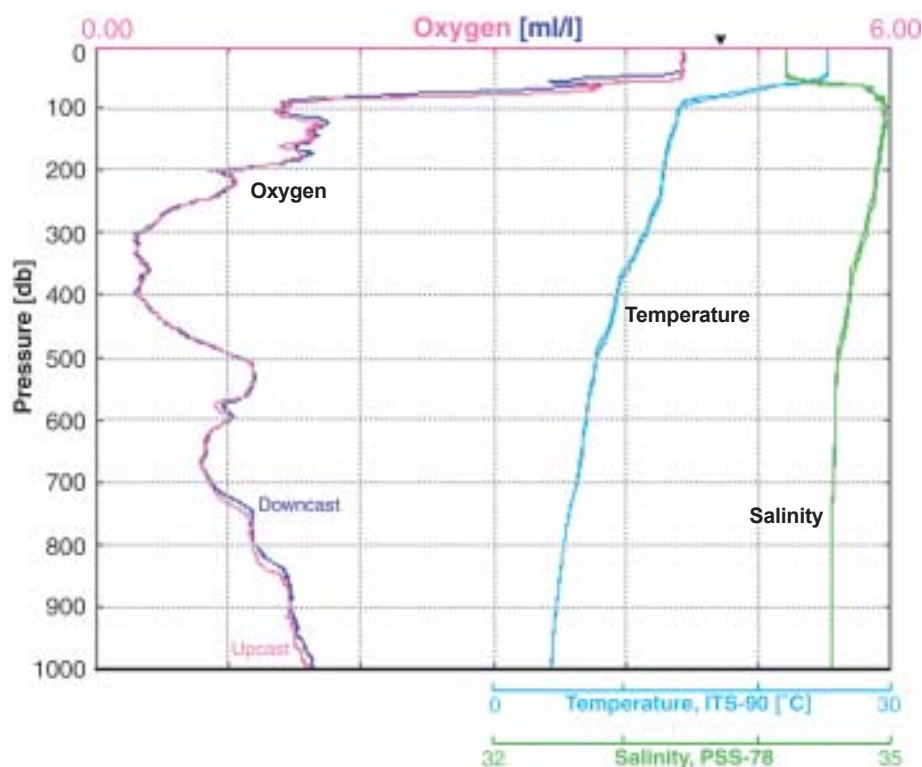

Equatorial Pacific
2° 0.9' N, 110° 2.2' W
25 Oct 2000

24 Hz SBE 911plus data; oxygen measurements were time shifted 6 seconds relative to pressure to account for water transit time through TC Duct and plumbing. No other processing was performed.

▼ surface oxsat = 4.7 ml/l

Downtrace and uptrace agree. In the steepest gradients, from saturation to anoxic — and warm to cold — our new **SBE 43 Dissolved Oxygen Sensor** closes the loop on oxygen profiles.

- Accurate out of the box
- Stable — 2% in 1000 hours
- No polarization delay
- Rated to 7000 meters
- Compatible with all pumped CTDs
- 5 year warranty includes one factory recharge



After five years of development and two years of field trials, the SBE 43 is the world's finest profiling dissolved oxygen sensor.

Will you need at-sea Winklers? Maybe not.



Sea-Bird Electronics, Inc.
1808 136th Place NE
Bellevue, Washington 98005 USA

Website: www.seabird.com
E-mail: seabird@seabird.com
Fax: 425-643-9954 Tel: 425-643-9866